

Fiberglass - Uncoated

Type F-240

DESCRIPTION:
Heat treated braided fiberglass designed to improve protection of wires while maintaining flexibility.


PROPERTIES:
Temperature Class C: +240°C
Intermittent Temp. Range: -75°C to +648°C guaranteed value
Dielectric Strength: Determined by a space factor

FEATURES:
 - High heat resistance
 - Extremely flexible
 - Good mechanical properties
 - Excellent chemical properties
 - Supplied in spooled lengths to minimize waste

SPECIFICATIONS:



- UL VW-1
- NEMA TF-1
- UL 746B Test Method
- UL 1441 Test Spec

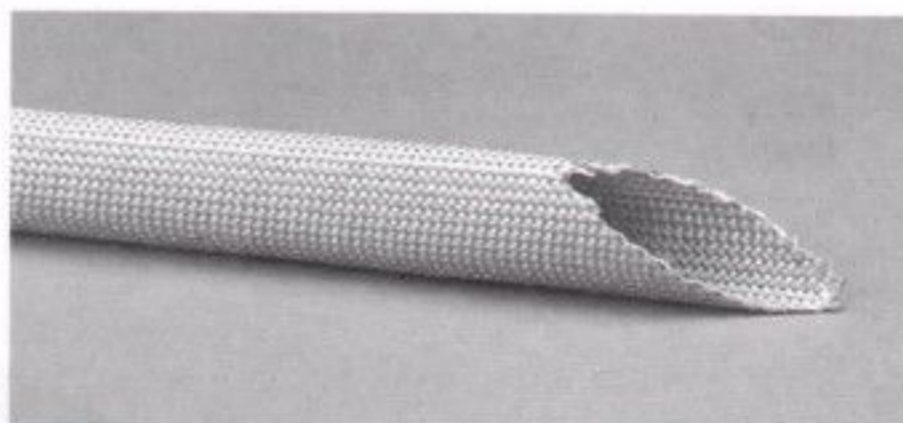

37

PART NUMBER (including size)	NOMINAL I.D.		NOMINAL WALL THICKNESS		STANDARD PUT-UP (Feet)
	INCHES	MM	INCHES	MM	
F-240-24	0.022	0.56	0.012	0.030	100, 1000
F-240-22	0.027	0.68	0.012	0.030	100, 1000
F-240-20	0.034	0.86	0.012	0.030	100, 1000
F-240-18	0.042	1.07	0.012	0.030	100, 1000
F-240-17	0.047	1.19	0.013	0.033	100, 1000
F-240-16	0.053	1.35	0.013	0.033	100, 500
F-240-15	0.059	1.50	0.015	0.038	100, 500
F-240-14	0.066	1.68	0.015	0.038	100, 500
F-240-13	0.076	1.93	0.015	0.038	100, 250
F-240-12	0.085	2.16	0.015	0.038	100, 250
F-240-11	0.095	2.41	0.015	0.038	100, 250
F-240-10	0.106	2.69	0.015	0.038	100, 250
F-240-9	0.118	3.00	0.015	0.038	100, 250
F-240-8	0.133	3.38	0.015	0.038	100, 250
F-240-7	0.148	3.76	0.015	0.038	100, 250
F-240-6	0.166	4.22	0.015	0.038	100, 250
F-240-5	0.186	4.72	0.015	0.038	100, 250
F-240-4	0.206	5.23	0.015	0.038	100, 250
F-240-3	0.234	5.94	0.018	0.046	100, 250
F-240-2	0.263	6.68	0.018	0.046	100, 250
F-240-1	0.294	7.47	0.018	0.046	125
F-240-0	0.330	8.38	0.018	0.046	125
F-240-3/8	0.387	9.83	0.022	0.056	125
F-240-7/16	0.450	11.40	0.022	0.056	125
F-240-1/2	0.512	13.00	0.022	0.056	100
F-240-5/8	0.640	16.20	0.022	0.056	100
F-240-3/4	0.768	19.50	0.022	0.056	100
F-240-7/8	0.802	22.70	0.022	0.056	100
F-240-1 IN	1.018	25.90	0.022	0.056	100

Stock Color: Natural (Silver)

Saturated types and colors available - contact factory

