

- **Shrink Temp. 194°F**
- **Flame Retardant**
- **Versatile & Economical Termination Solution**
- **Wide Selection of Sizes and Colors**
- **Resists Common Automotive Chemicals**
- **Mil-I-23053/5**

Shrinkflex heatshrink tubing is the ideal way to create a tight, professional finish on any wire, hose, or cable management project.

2:1 Polyolefin Heatshrink Tubing

When economy is priority, 2:1 Shrinkflex heatshrink tubing is the answer. Not as versatile as a high ratio shrink product, 2:1 will still slide easily over small inline splices and connectors and provide a tight seal in many applications.




Shrinkflex shop spools fit into our dispenser kit (pg. 101) for easy storage and organization.

| Nominal Size | Part # | Unshrunk Diameter | Shrunk Diameter | Standard Spool Put-Ups | | Available Colors | Lbs/100' |
|--------------|-----------|-------------------|-----------------|------------------------|------------|----------------------|----------|
| | | | | Bulk Spool | Shop Spool | | |
| 3/64" | H2N0.05 | 1.3mm | 0.6mm | 500' | 25' | 11 | 0.16 |
| 1/16" | H2N0.06 | 1.8mm | 0.8mm | 500' | 25' | 11 | 0.22 |
| 1/8" | H2N0.13 | 3.4mm | 1.6mm | 500' | 25' | 11 | 0.43 |
| 3/16" | H2N0.19 | 5.0mm | 2.4mm | 500' | 25' | BK & CL | 0.60 |
| 1/4" | H2N0.25 | 6.4mm | 3.2mm | 250' | 25' | 11 | 1.04 |
| 3/8" | H2N0.38 | 9.5mm | 4.8mm | 200' | 25' | 11 | 1.31 |
| 1/2" | H2N0.50 | 12.7mm | 6.4mm | 200' | 25' | 11 | 1.52 |
| 5/8" | H2N0.63 | 16.7mm | 8.0mm | 100' | 25' | 11 | 2.12 |
| 3/4" | H2N0.75 | 19.1mm | 9.4mm | 100' | 25' | 11 | 2.58 |
| 1" | H2N1.00 | 25.7mm | 12.7mm | 100' | 25' | 11 | 3.74 |
| 1 1/2" | H2N1.50 | 38.1mm | 19.1mm | 100' | 25' | 11 | 5.53 |
| 2" | H2N2.00 | 51.0mm | 25.4mm | 100' | 25' | 11 | 8.25 |
| 3" | H2N3.00 | 76.2mm | 38.1mm | 100' | 25' | BK,CL,GN,GY,RD,WH,YL | 13.15 |
| 4" | H2N4.00BK | 101.6mm | 50.8mm | 100' | 25' | BK | 23.50 |




3:1 Polyolefin Heatshrink Tubing

The high shrink ratio of 3:1 Shrinkflex heatshrink tubing ensures that the tubing will slip over large connectors or plugs and still provide a tight, professional seal.

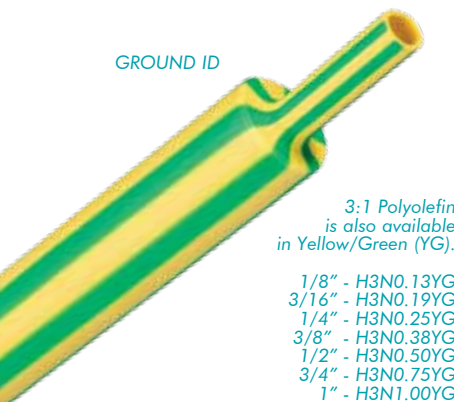

| Nominal Size | Part # | Unshrunk Diameter | Shrunk Diameter | Standard Spool Put-Ups | | Available Colors | Lbs/100' |
|--------------|---------|-------------------|-----------------|------------------------|------------|------------------|----------|
| | | | | Bulk Spool | Shop Spool | | |
| 1/16" | H3N0.06 | 1.5mm | 0.5mm | 500' | 25' | 11 | 0.18 |
| 1/8" | H3N0.13 | 3.0mm | 1.0mm | 500' | 25' | 11 & YG | 0.37 |
| 3/16" | H3N0.19 | 4.5mm | 1.5mm | 250' | 25' | 11 & YG | 0.55 |
| 1/4" | H3N0.25 | 6.0mm | 2.0mm | 250' | 25' | 11 & YG | 0.74 |
| 3/8" | H3N0.38 | 9.0mm | 3.0mm | 200' | 25' | 11 & YG | 1.01 |
| 1/2" | H3N0.50 | 12.0mm | 4.0mm | 200' | 25' | 11 & YG | 1.28 |
| 3/4" | H3N0.75 | 18.8mm | 6.0mm | 100' | 25' | 11 & YG | 1.87 |
| 1" | H3N1.00 | 24.0mm | 8.0mm | 100' | 25' | 11 & YG | 2.86 |
| 1 1/2" | H3N1.50 | 38.0mm | 13.0mm | 100' | 25' | 11 | 4.51 |
| 2" | H3N2.00 | 50.0mm | 17.0mm | 100' | 25' | 11 | 6.33 |
| 3" | H3N3.00 | 75.0mm | 25.4mm | 100' | 20' | BK | 10.33 |

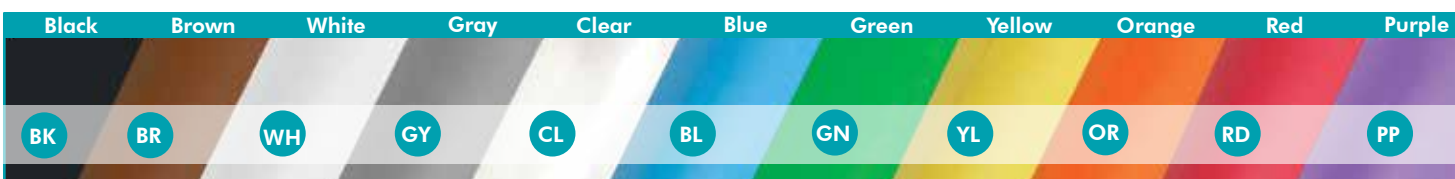

*Contact your account representative for heatshrink cutting & printing services.